MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V7–4S27D8

CW–C4155

REPLACES X100135–V7

RELEASE NO. PR–22070

CATALOG LISTING V7–4S27D8
PAGE 1 OF 1

ISSUE 2

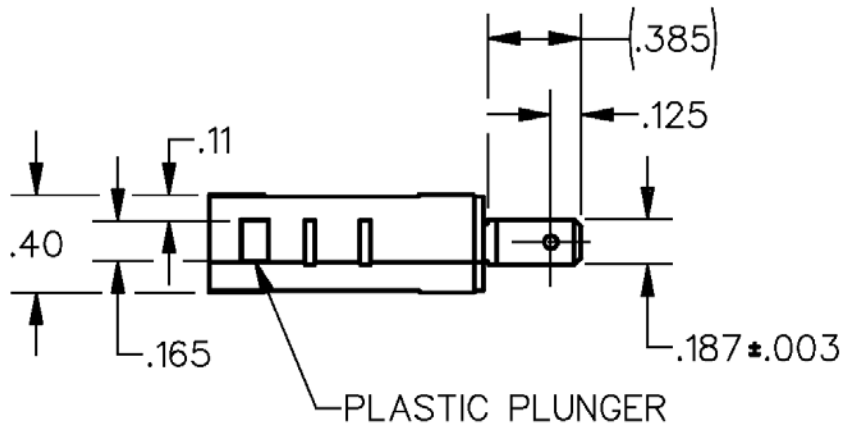

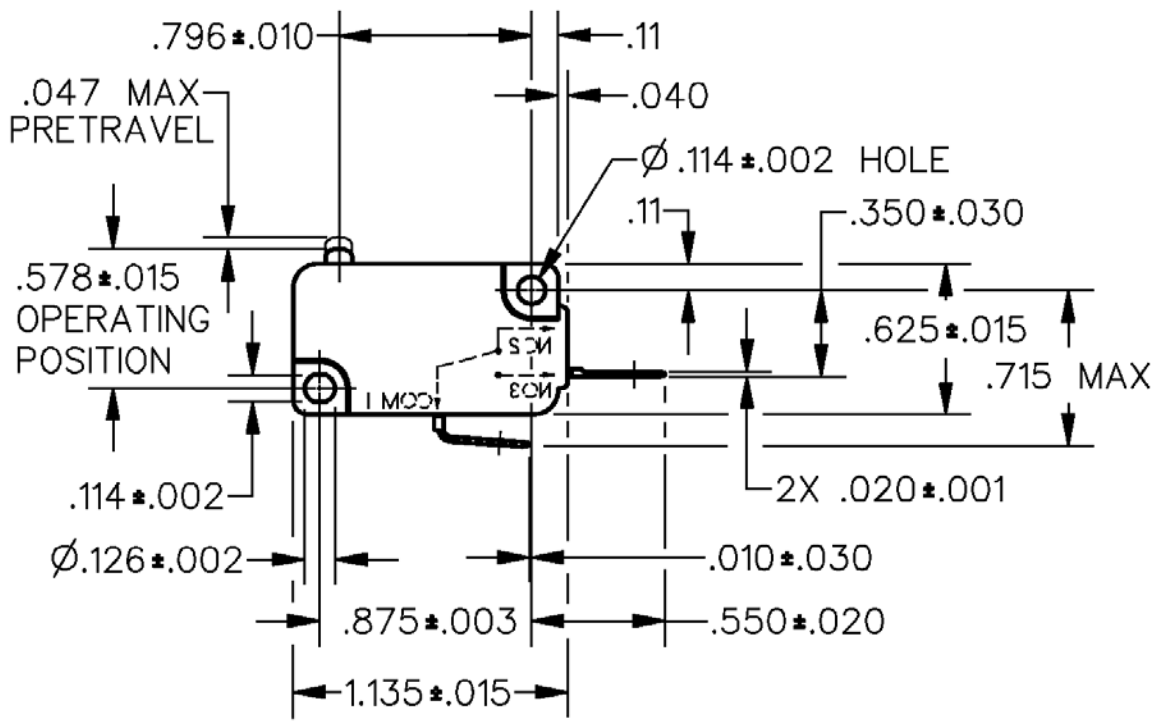

NOTES
1 – IN INSPECTION, DO NOT BURN OUT – GOLD CONTACTS
2 – IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL — DO NOT SCALE PRINT
OPERATING FORCE – – – 25 GRAMS MAX	CONTACT ARRANGEMENT S P N O	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
DIFFERENTIAL TRAVEL – – – .002–.010		ONE PLACE (.0) ±.030
OVERTRAVEL – – – – – – .050 MIN	L142 0.1A 125 VAC	TWO PLACE (.00) ±.015
FREE POSITION – – – – .625 MAX		THREE PLACE (.000) ±.005
RELEASE TRAVEL – – – – .010 MIN		ANGLES ±
		WEIGHT

REVISIONS
A CO–93311 TSM 26 OCT 98

FORMTEK
DRAWN DCS 24 FEB 96 CHECK
CHECK
CHECK