


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: X100W/COLOR HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6. AVAILABLE IN TEN COLORS. CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM. SPRING: STAINLESS STEEL TYPE 302.
- P/N: 9260C/COLOR HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS. FRAME: BRASS. NICKEL PLATED CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
- P/N: W-600/COLOR 18AWG 65X36 TINNED COPPER 0.144 [3.66] O.D. PVC INSULATION AVAILABLE IN TEN COLORS.
- PERFORMANCE
 MAXIMUM CURRENT: 4.0 AMPS
 MAXIMUM VOLTAGE: 5000 W.V.D.C.
 MAXIMUM TEMPERATURE: 221°F (105°C)

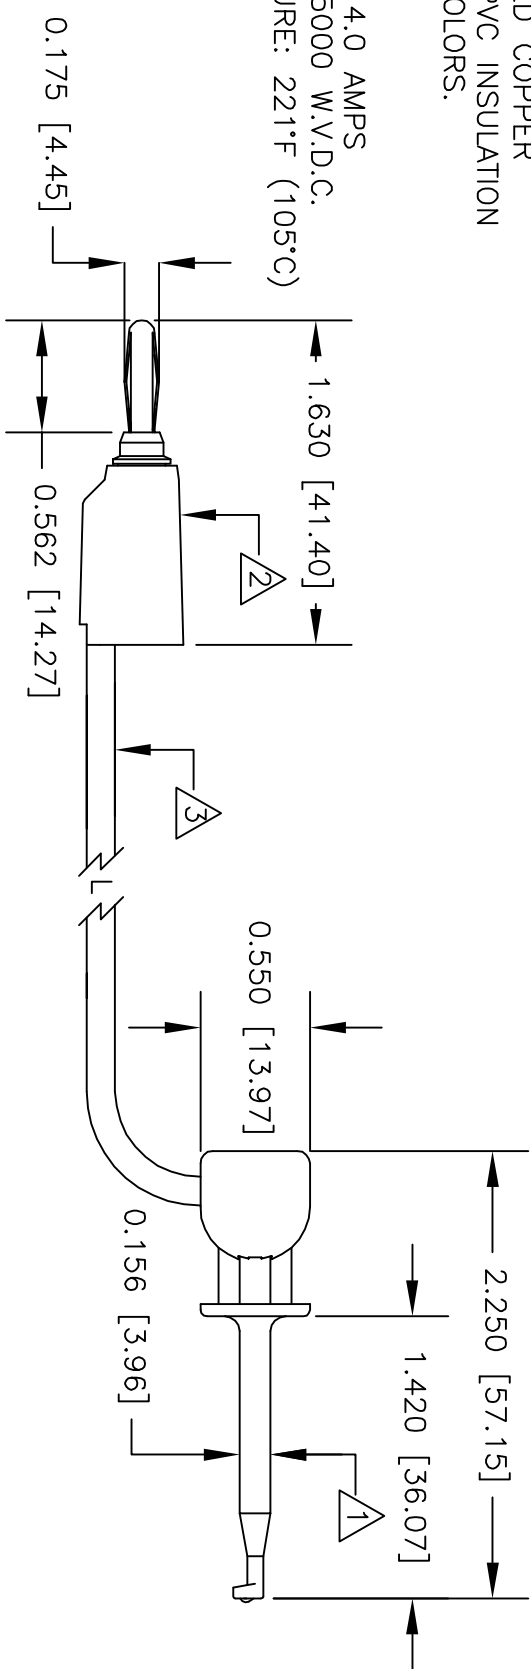

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
±	.XX ±	±		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE	MINI-HOOK (X100W) TO
			DRAWN	9/10	STK BANANA PLUG (9260)
			APPROVED BY		
MATERIAL SEE NOTE.				SIZE CODE IDENT NO. DRAWING NO.	
FINISH SEE NOTE.				A 08505 601W	
USED ON				SCALE 1:1	
APPLICATION		DO NOT SCALE DRAWING		SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.