
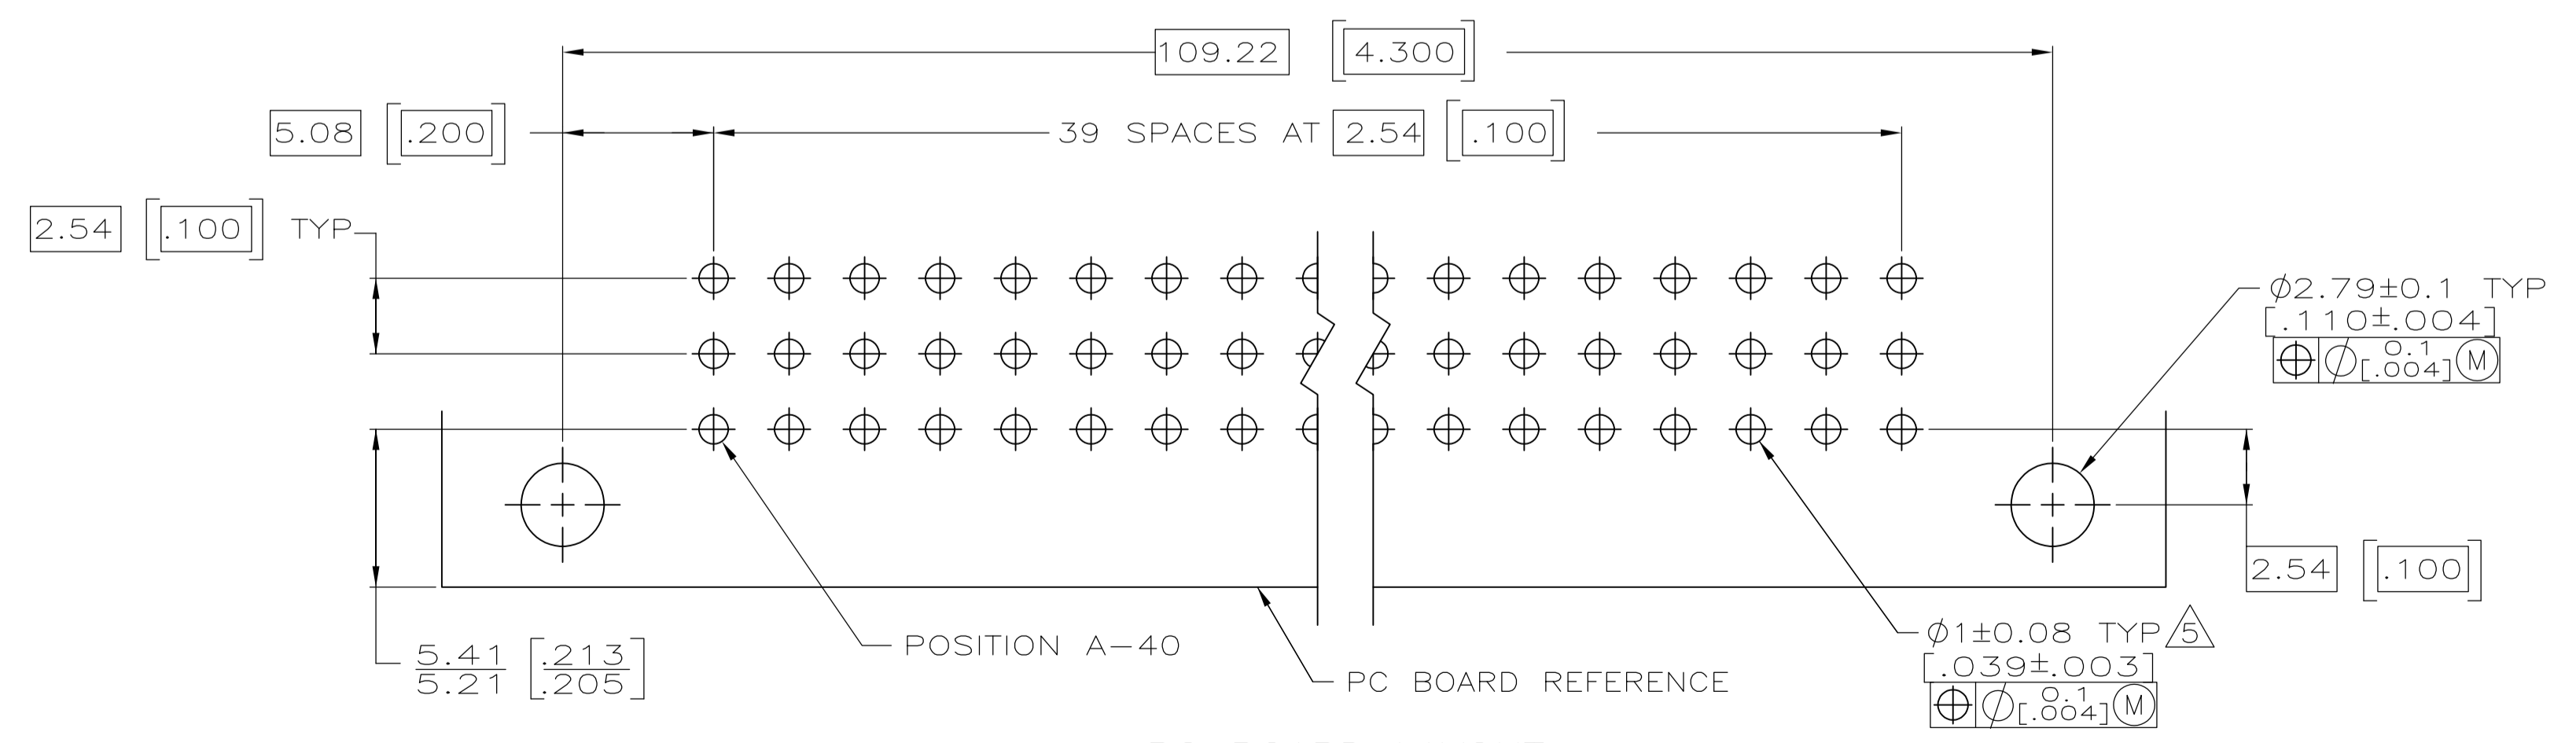
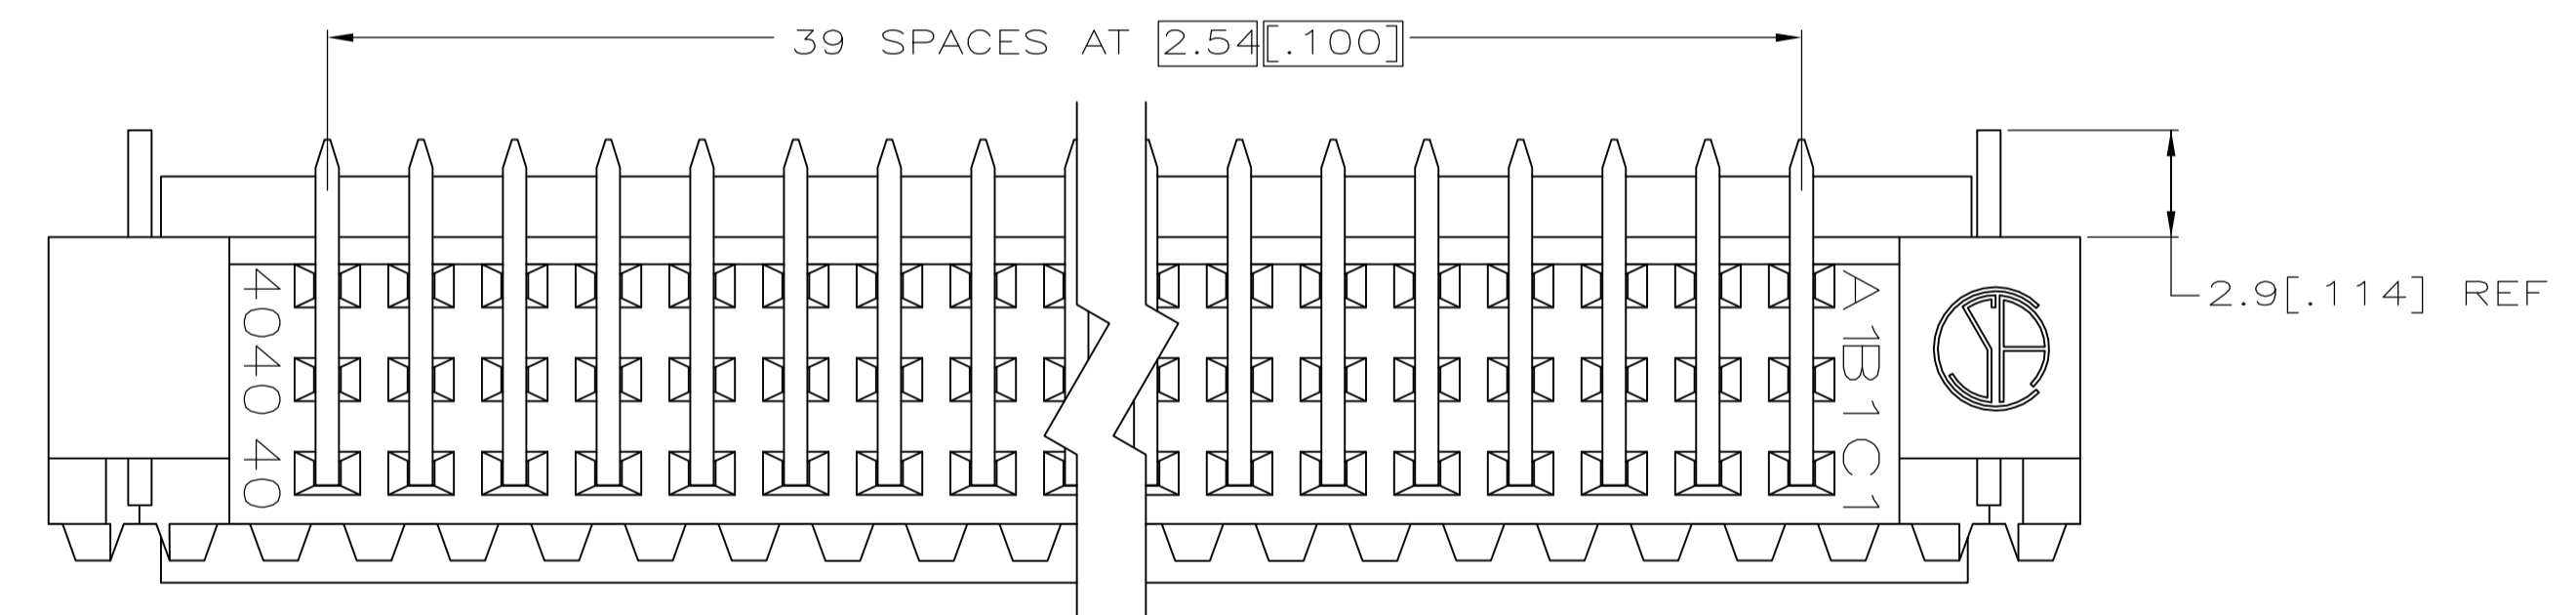
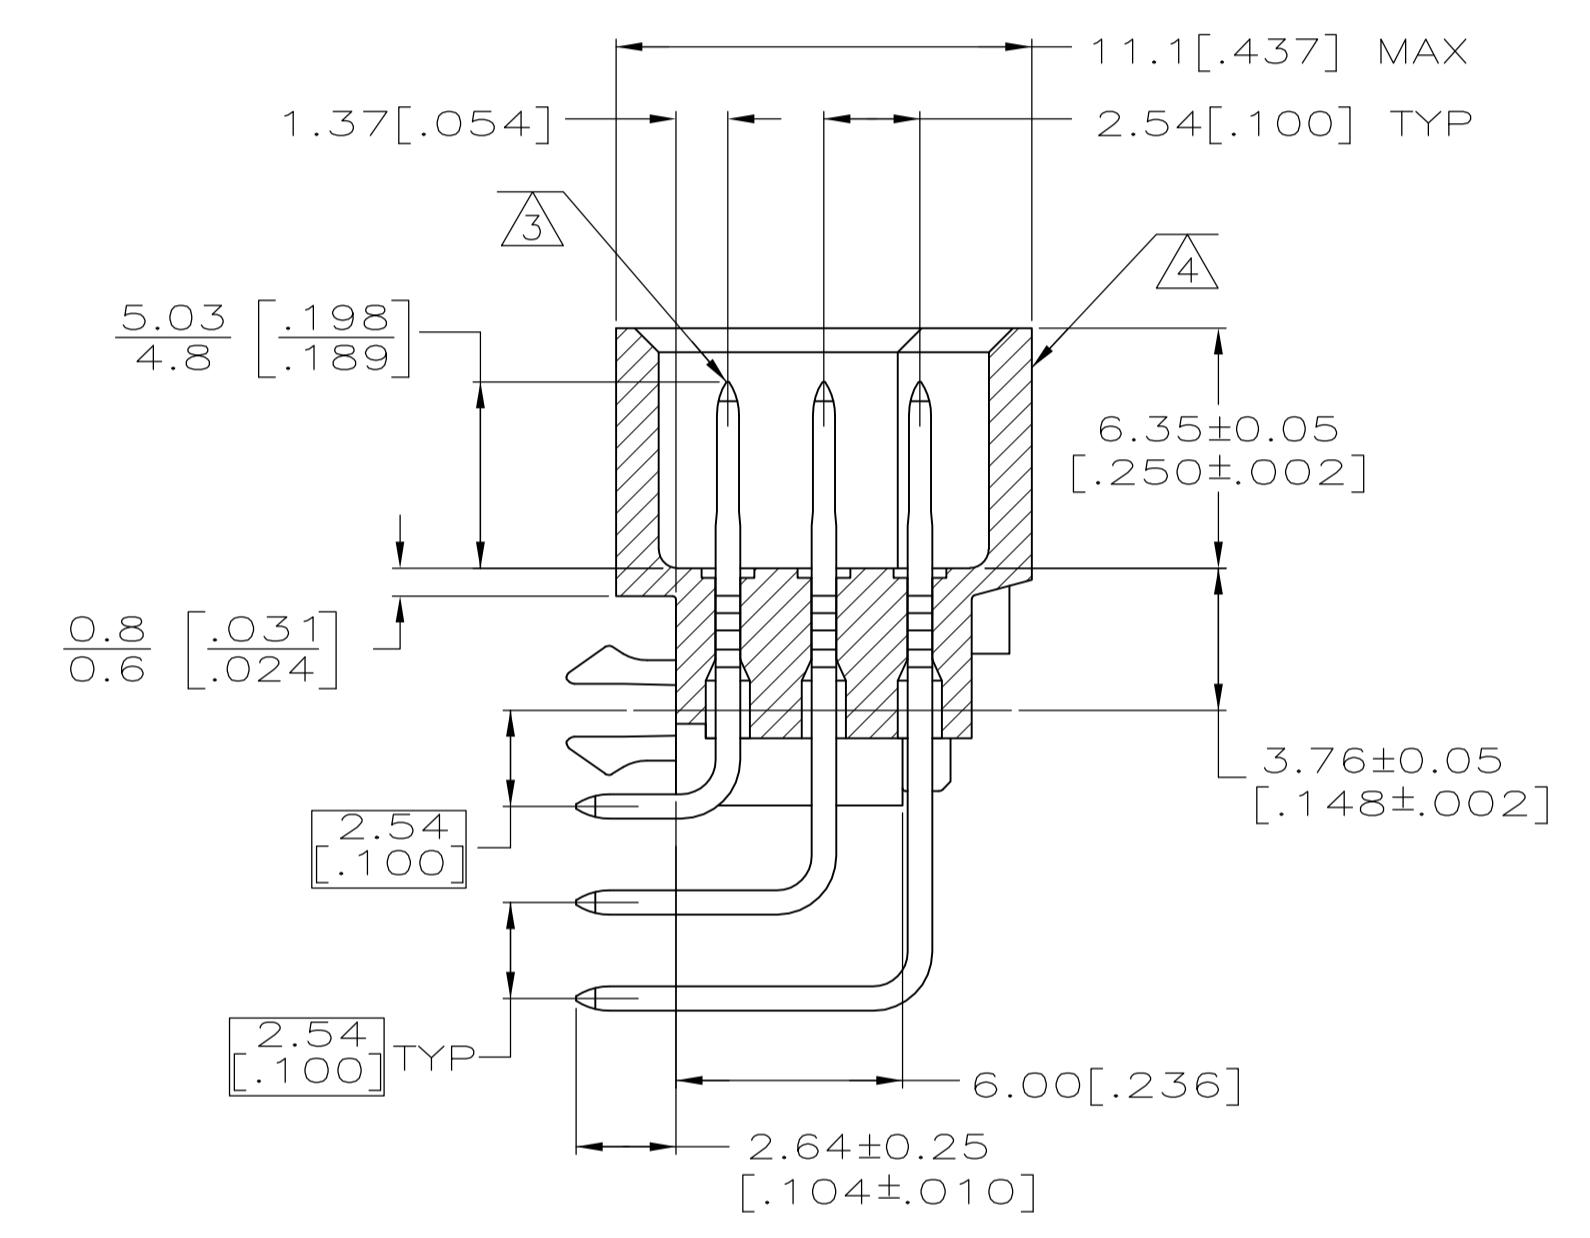


- ⚠ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- ⚠ POST MATERIAL: COPPER ALLOY.
- ⚠ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATING ON POSTS.
- ⚠ MARKING ON THIS SIDE.
- ⚠ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- ⚠ PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.

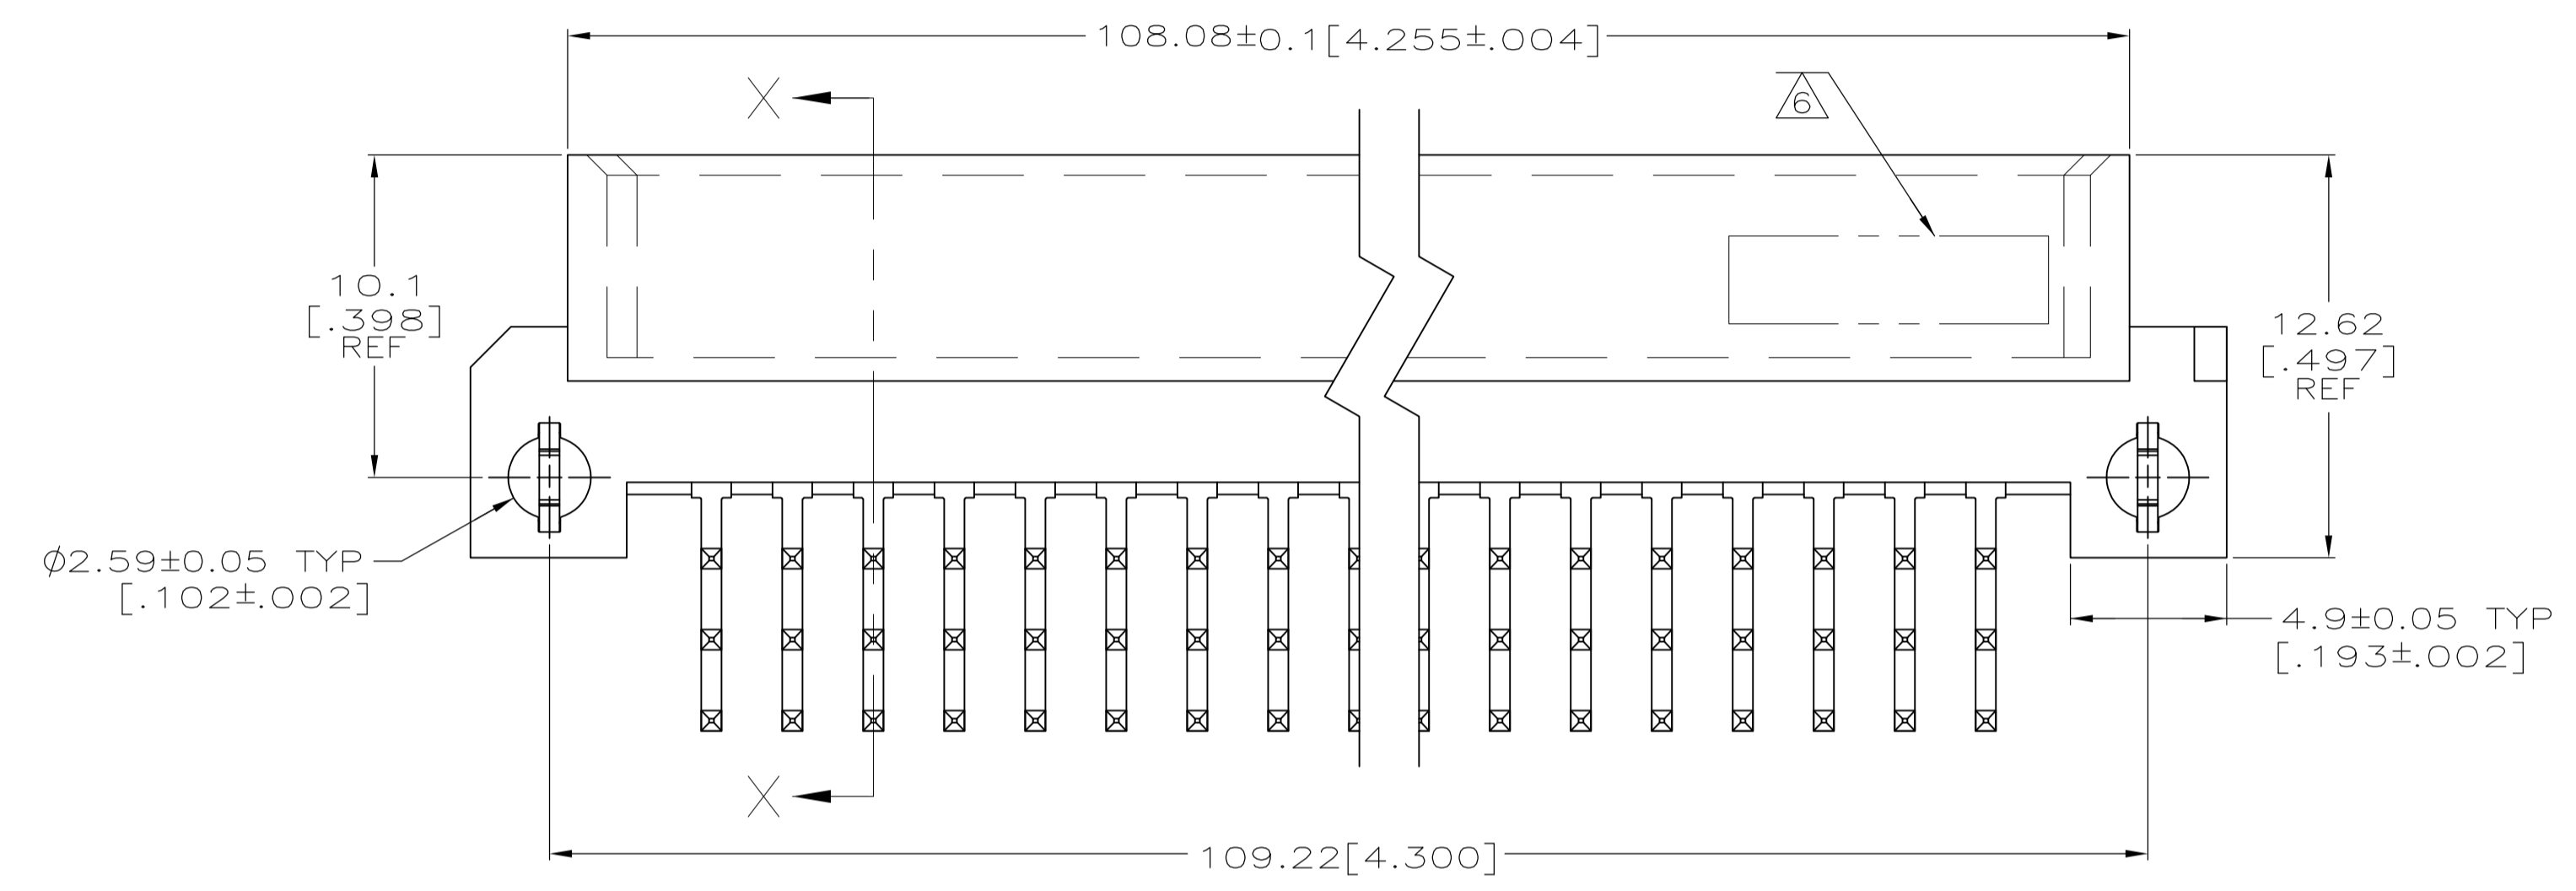

SECTION X-X

PC BOARD LAYOUT
 RECOMMENDED PC BOARD THICKNESS 1.57 [.062]

1-40	X	X	X	120	5650914-5
POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. POLIGNONE OSMAVOS		Tyco Electronics Corporation	
DIMENSIONS: mm [INCHES]		CIK A. SHARPE OSMAVOS		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. SHARPE OSMAVOS		NAME ASSEMBLY, PIN, EUROCARD, TYPE C, 120 POSITION, 2.64 [.104] SOLDER POST, WITH BOARD LOCKS	
0 PLC ± -		PRODUCT SPEC		SIZE CAGE CODE DRAWING NO. RESTRICTED TO	
1 PLC ± -		APPLICATION SPEC		A1 00779 C=5650914	
2 PLC ± 0.13 [.005]		MATERIAL		WEIGHT	
3 PLC ± -		FINISH		SCALE 5:1 SHEET 1 OF 1 REV 01	
4 PLC ± -		CUSTOMER DRAWING			
ANGLES ± -					