


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|--|------|----------------------|
| 1 | 50-00540 | Connector, dc plug, 5.5x2.1x23 mm, molding style, spring contacts, nickel plated, 105° C | 1 | |
| 2 | 30-00795 | Wire, 2C TS, 18 AWG, UL2651, 300V, 105C, 4.4 mm, VW-1, PVC, red and black | 1 | |
| 3 | 24-00190 | Overmold, 90°, dc plug | 1 | black, 105° C, 94V-0 |

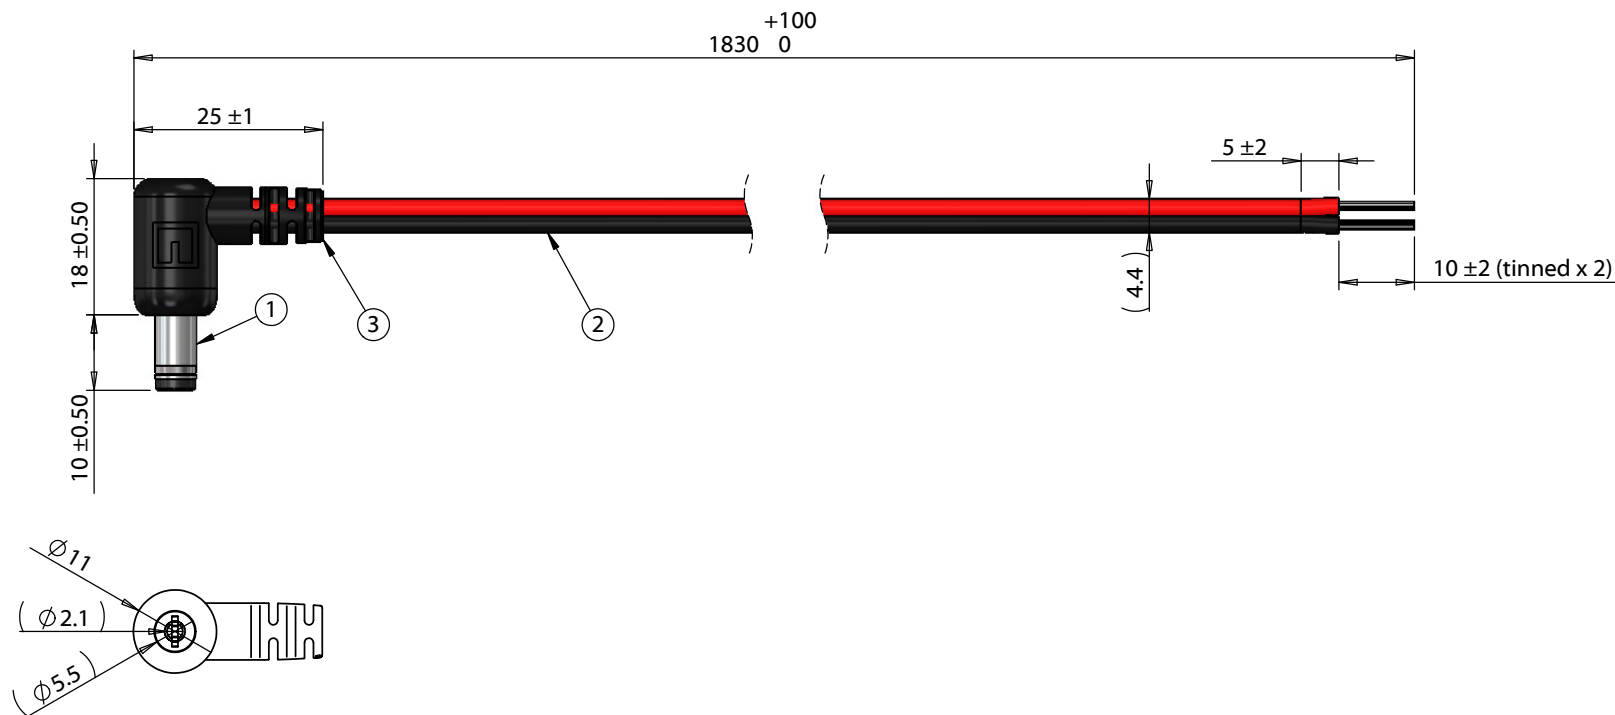

| Wiring Diagram | |
|----------------|------------|
| 50-00540 | wire color |
| center | red |
| sleeve | black |

Notes:
Functionally equivalent components may be substituted

| | | | | | |
|------------|-----------|-------------------------|--|--|--|
| Revision: | Date: | Description: | Prepared: | Notes: | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 12/6/2016 | Initial release | Verified: | RoHS and REACH compliant | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Function test: no open, no short circuit, no intermittent | |
| | | | | Description: Cable, 1830 mm, 5.5x2.1x10 mm 90° 50-00540 dc plug to 10 mm tinned, 18 AWG, 30-00795 R-B wire, 105°C | |
| Scale: 1:1 | | Part number: A 10-02319 | | Sheet 1 of 1 | |