
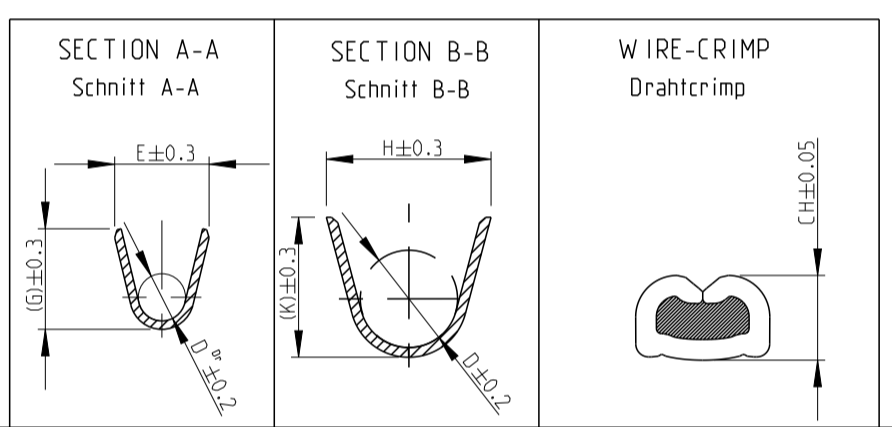
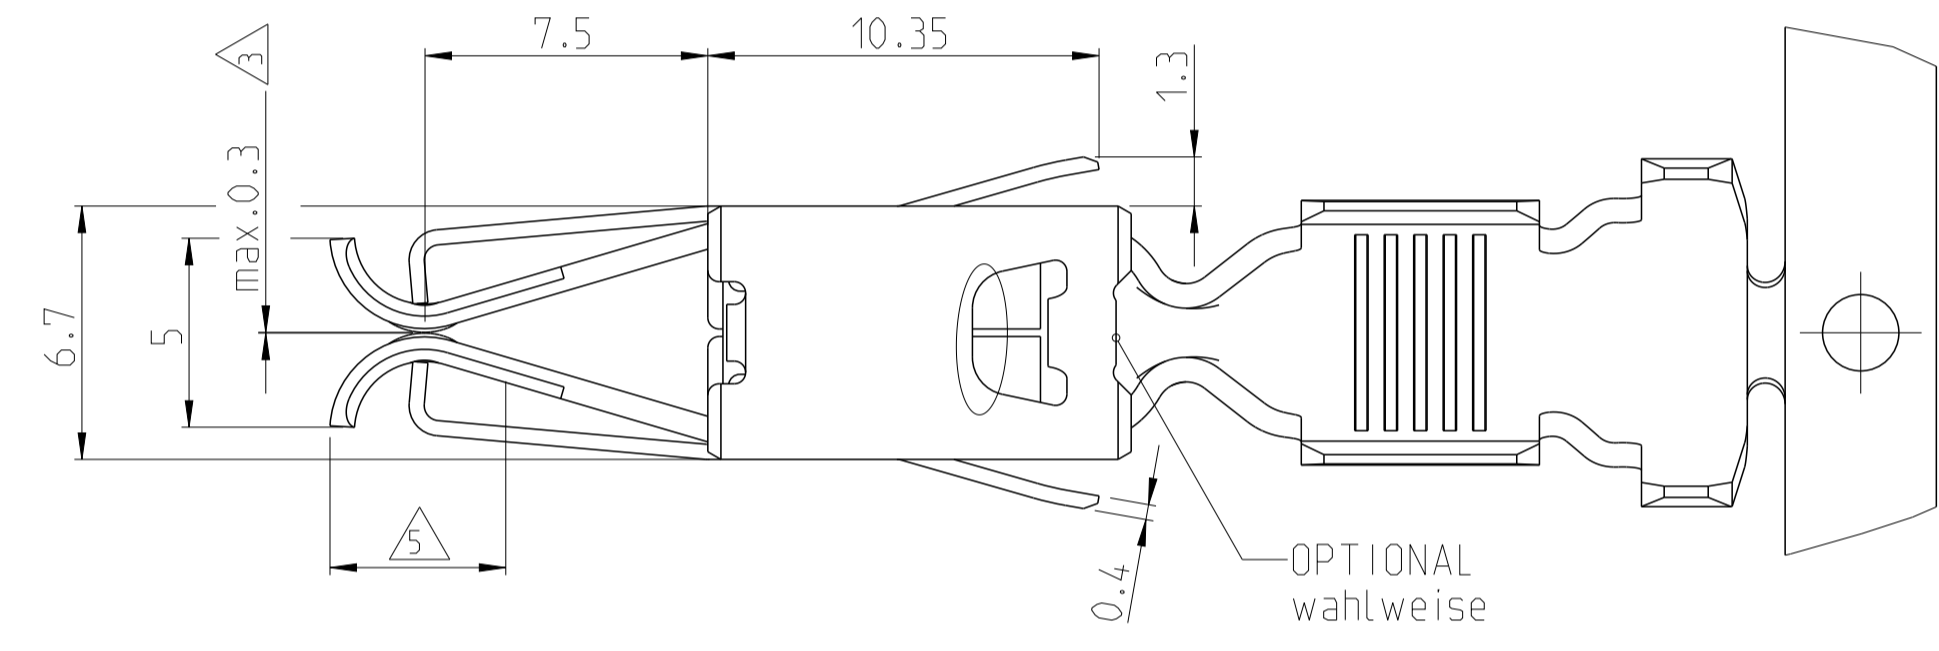




REVISIONS				
P.	LTN	DESCRIPTION	DATE	APPROV
A6		Drawing review ECR-12-018815	29OCT2012	MP C V
A7		ECR-13-011943	26JUL2013	MP PSI
AB		ECR-15-012070	13AUG2015	JB, JH BK
A9		ECR-16-014733	18OCT2016	GH MP

- 1 VERSION WITH REDUCED MATING FORCE
Ausführung mit reduzierter Steckkraft
- 2 SUITABLE FOR TABS 8x1.2mm AND 9.5x1.2mm
Geeignet fuer Flachstecker 8x1.2mm und 9.5x1.2mm
- 3 FOR CRITIZATION OF THE GAP-SIZE.
THE MATING-FORCE HAS PRIORITY
(<40N WITH TEST TAB ACC. TO PRODUCT SPEC).
Zur Beurteilung des Öffnungsmasses
ist die Steckkraft ausschlaggebend
(<40N mit der Pruefung tab nach produktspezifikation).
- 4 1-3µm TIN LAYER FOR HIGHER TEMPERATURE REQUIREMENTS.
1-3µm Zinnschicht fuer hoehere Temperaturanforderungen.
- 5 CONTACT ZONE SELECTIVE PRE-SILVER PLATED MIN. 3 µm; REST Ag FLASH
Kontaktzone selektiv voresilbert min. 3µm; Rest Ag Blitz

VERSION A
(UNSEALED / ungedichtet)

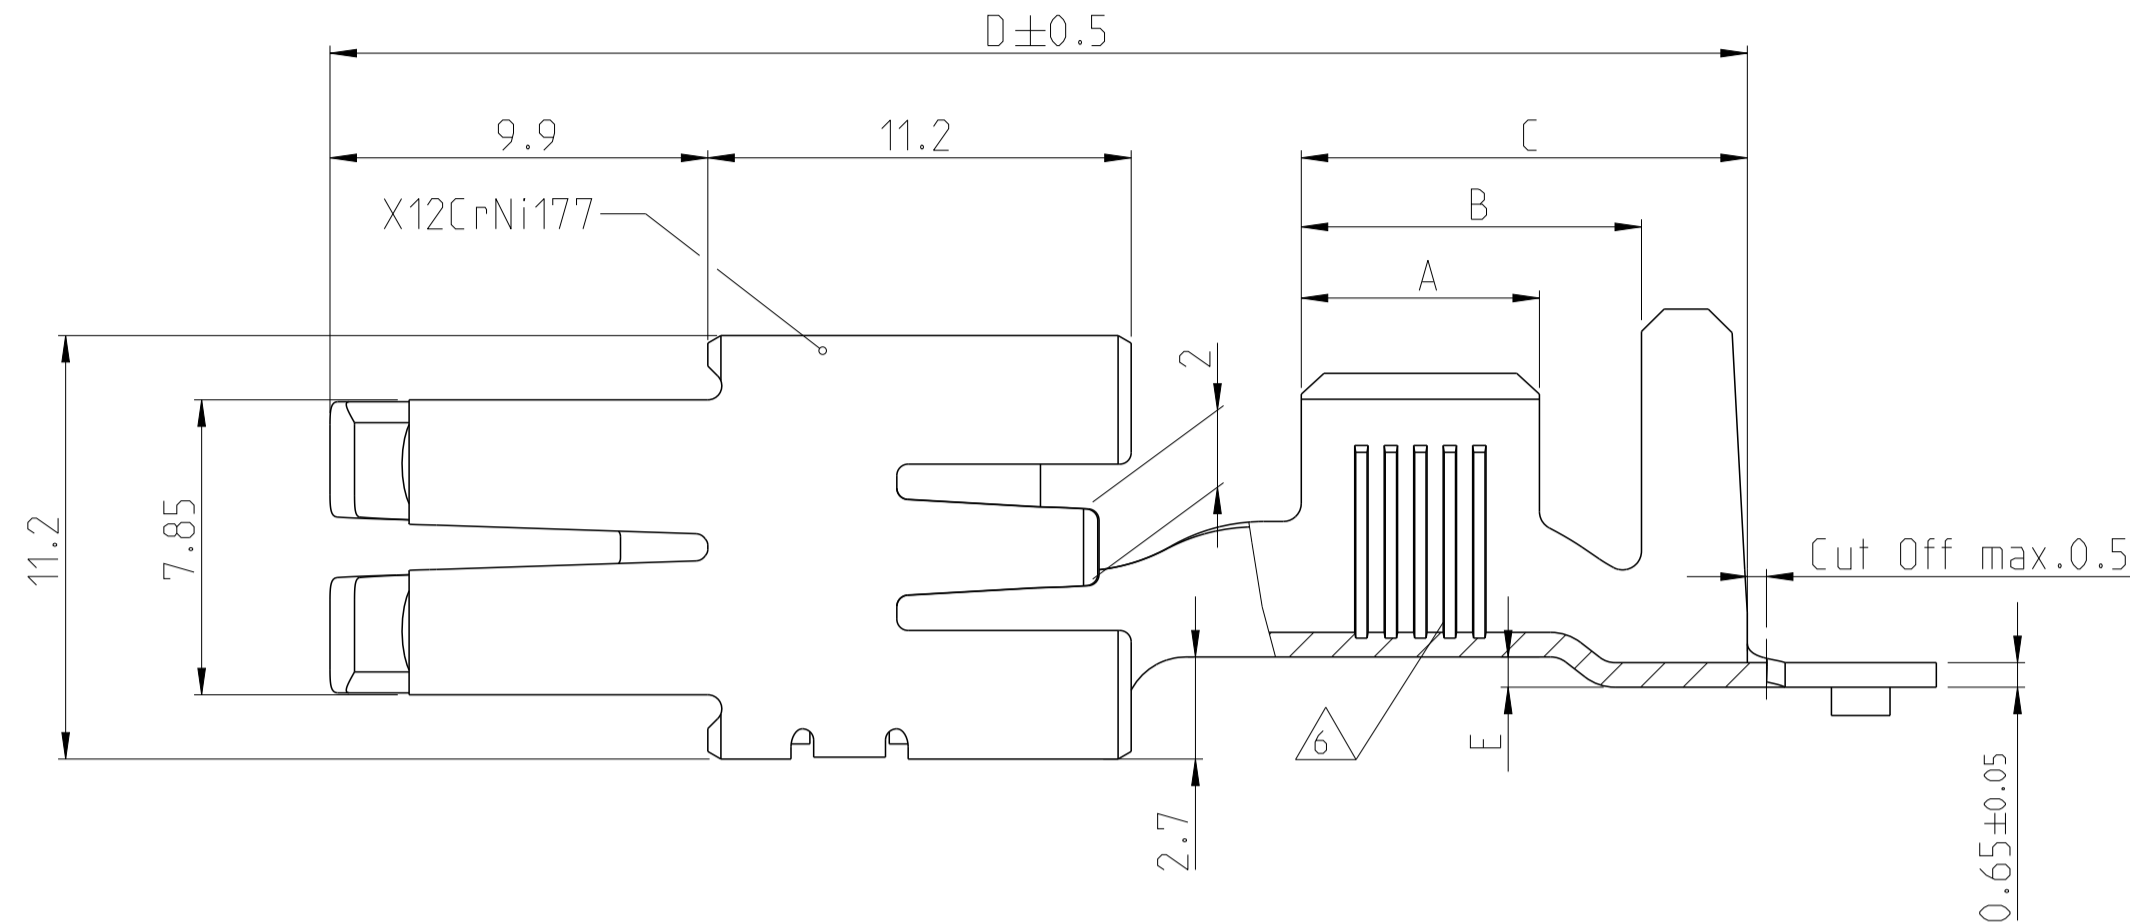


VERSION B
(SINGLE WIRE SEAL-SYSTEM / Einzel-Dichtungs-System)

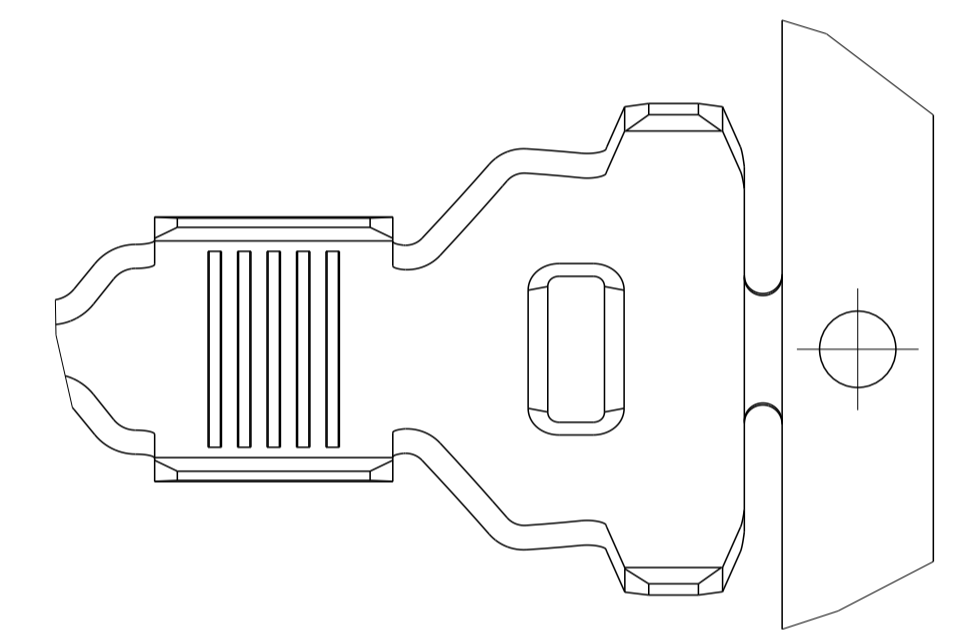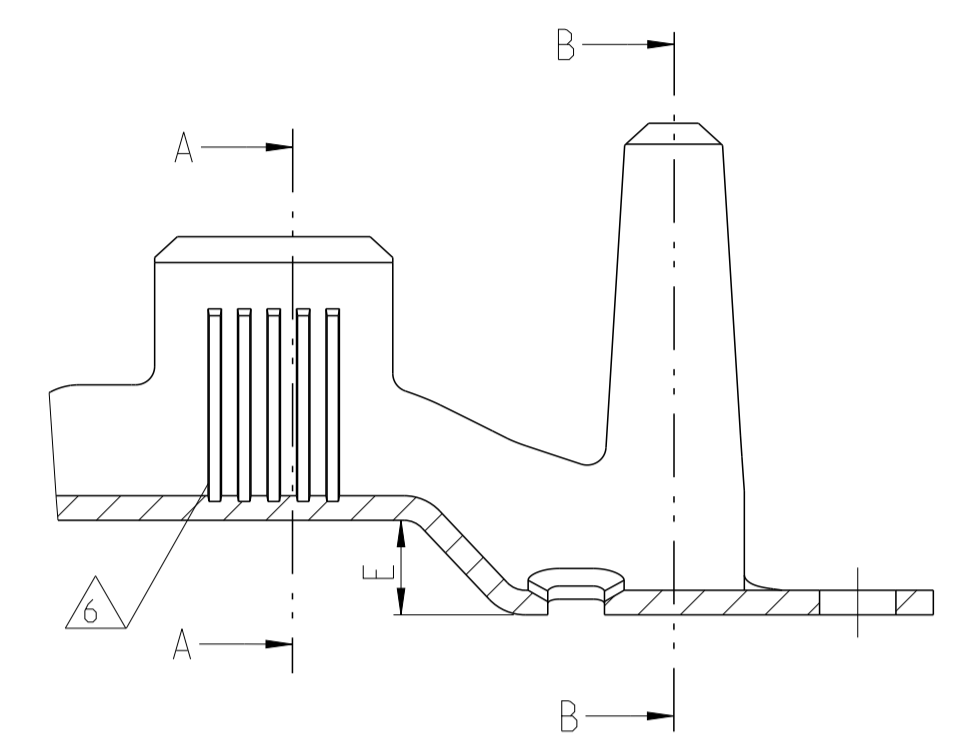

VERSION B																	
962938-1	F	CuNiSi	vorverzinkt PRETINNED	5	6.0-10.0	6.0-6.6 FLK	E=7.0 G=7.5 D _{gr} =3.7	H=13.0 K=13.0 D=9.5	10.0mm ² =3.82 - 6.0mm ² =3.20	680699 MQC-Applicator 2-878660-2	-	6.3	11.9	15.6	41	2.5	
962936-1	F	CuNiSi	vorverzinkt PRETINNED	4	4.0-6.0	4.7-5.2 FLK	E=5.6 G=5.9 D _{gr} =3.0	H=13.0 K=13.0 D=9.5	6.0mm ² =3.08 - 4.0mm ² =2.74	2151146 MQC-Applicator 2-878595-2	-	5.5	11.1	14.8	41	2.5	
962934-1	D	CuNiSi	vorverzinkt PRETINNED	4	>2.5-4.0	4.0-4.5 FLK	E=4.9 G=5.1 D _{gr} =2.3	H=13.0 K=13.0 D=9.5	4.0mm ² =2.71 - -	1855578 MQC-Applicator 2-878594-2	-	4.5	11.1	14.8	41	2.5	

VERSION A																	
1-962932-6	A	CuNiSi	4	5	6.0-10.0	4.7-6.6 FLK	E=7.0 G=7.5 D _{gr} =3.7	H=9.2 K=10.0 D=5.9	10.0mm ² =3.82 8.5mm ² =3.59 6.5mm ² =3.28 6.0mm ² =3.20	2151285 MQC-Applicator 2-878659-2	734533-1 (only for 10mm ²)	6.3	9.0	11.8	37.5	0.8	
962932-1	H	CuNiSi	vorverzinkt PRETINNED	4	4.0-6.0	4.0-5.2 FLK	E=5.6 G=5.9 D _{gr} =3.0	H=7.8 K=8.1 D=4.5	6.0mm ² =3.08 5.5mm ² =3.00 5.0mm ² =2.91 4.0mm ² =2.74	2151284 MQC-Applicator 1855532	734532-1 (only for 6mm ²)	5.5	7.8	10.1	37.5	0.6	
1-962930-6	A	CuNiSi	4	4	>2.5-4.0	3.3-4.7 FLK	E=4.9 G=5.1 D _{gr} =2.3	H=6.9 K=7.2 D=4.0	4.0mm ² =2.71 3.5mm ² =2.62 3.0mm ² =2.52 2.5mm ² =2.42	2151492 MQC-Applicator 2-878592-2	734531-1	4.5	6.8	9.1	37.5	0.6	
962930-1	H	CuNiSi	vorverzinkt PRETINNED	4	>2.5-4.0	3.3-4.7 FLK	E=4.9 G=5.1 D _{gr} =2.3	H=6.9 K=7.2 D=4.0	4.0mm ² =2.71 3.5mm ² =2.62 3.0mm ² =2.52 2.5mm ² =2.42	2151492 MQC-Applicator 2-878592-2	734531-1	4.5	6.8	9.1	37.5	0.6	

PN STRIP FORM Bandware	REV.	MATERIAL Werkstoff	SURFACE Oberfloechе	NUMBER OF SERRATIONS Anzahl der Verzahnungen	DGB WIRE RANGE [mm ²]	INSULATION DIAMETER [mm]	STRIP FORM WIRE CRIMP Drahtcrimp Bandware	INSUL.-CRIMP Isol.-Crimp Bandware	WIRE CRIMP HEIGHT CH Drahtcrimp-Hoehe CH	APPLICATION TOOL Anschlag-WKZ	HAND TOOL Handzange	A	B	C	D	E
				6												-0.25 -0.15
CRIMP DIMENSION (mm) Crimpabmessungen (mm)										EXTRACTION TOOL Ausdruckwerkzeug No.: 1-1579007-7						

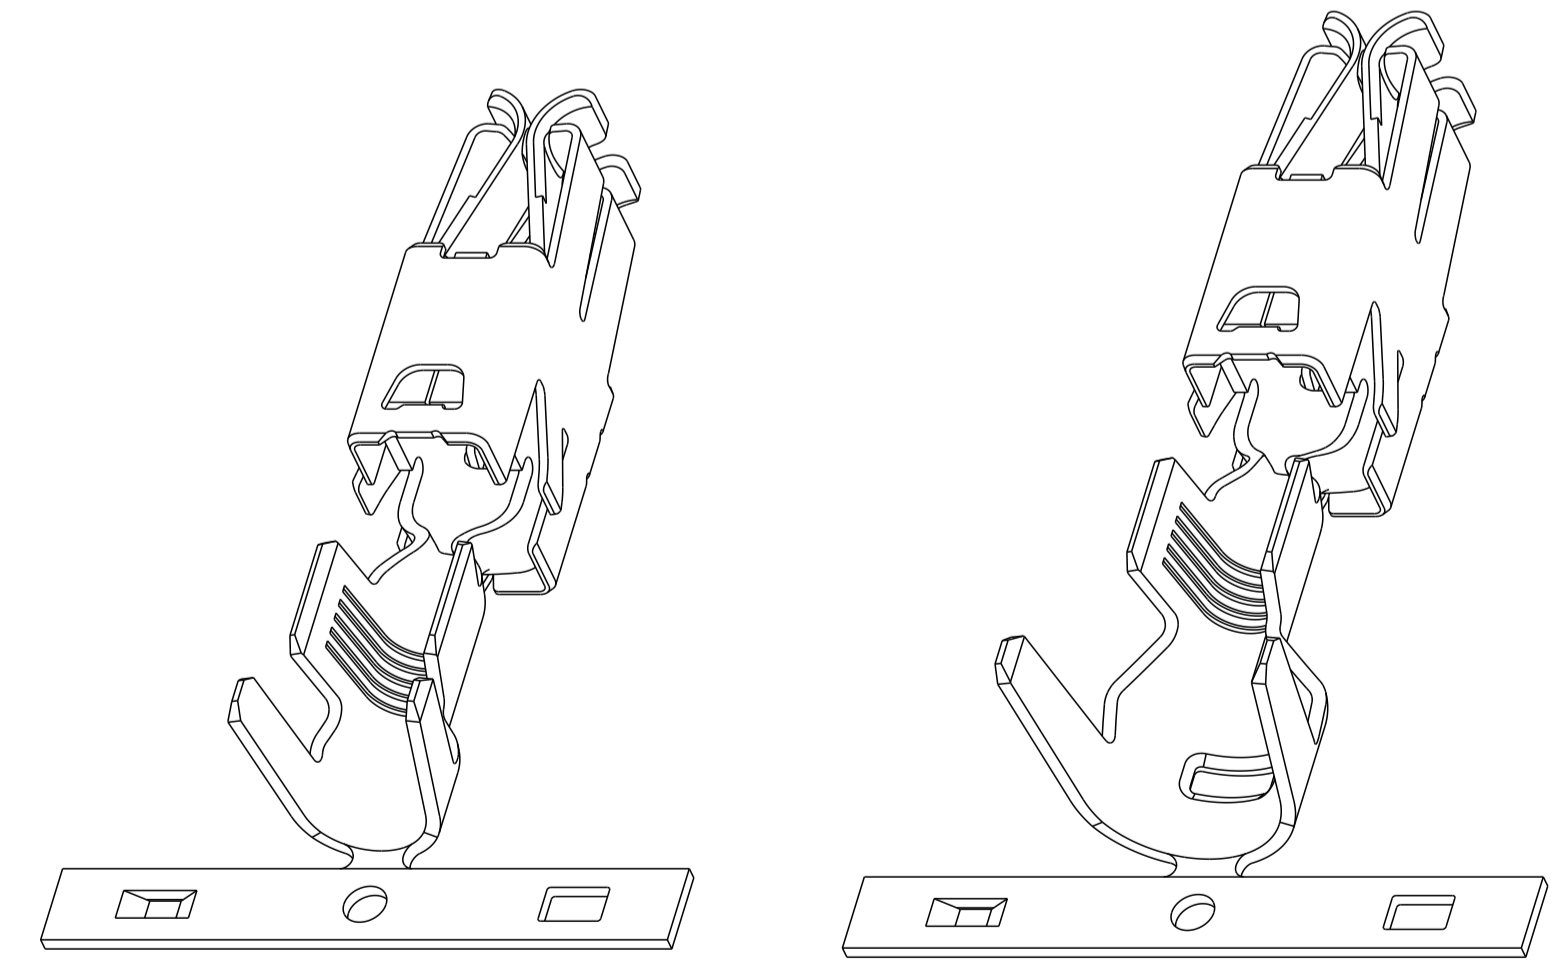

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm. TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2mm. MATERIAL: SEE TABLE. FINISH: SEE TABLE.

Customer Drawing

SCALE 5:1 SHEET 1 OF 1 REV. A9

TE Connectivity
 NAME: MAXI POWER TIMER FOR 1.2MM TABS
 MAXI POWER TIMER für 1.2mm TABS
 SIZE: A1 CAGE CODE: 00779 DRAWING NO: 1355050