






| PERFORMANCE SPECIFICATION | MIN | TYP | MAX | UNITS |
|--|------|------|------|--------------|
| Lower Frequency: | | | 2555 | MHz |
| Upper Frequency: | 2695 | | | MHz |
| Tuning Voltage: | 0.3 | | 4.7 | VDC |
| Supply Voltage: | 4.75 | 5.0 | 5.25 | VDC |
| Output Power: | 0 | +3.0 | +6.0 | dBm |
| Supply Current: | | 30 | | mA |
| Harmonic Suppression (2 nd Harmonic): | | -20 | | dBc |
| Pushing: | | 2.0 | | MHz/V |
| Pulling, all Phases: | | 4.0 | | MHz pk-pk |
| Tuning Sensitivity: | | 50 | | MHz/V |
| Phase Noise @ 10kHz offset: | | -104 | | dBc/Hz |
| Phase Noise @ 100kHz offset: | | -124 | | dBc/Hz |
| Load Impedance: | | 50 | | Ω |
| Input Capacitance: | | | 15 | pF |
| Operating Temperature Range: | -40 | | +85 | $^{\circ}$ C |
| Storage Temperature Range: | -45 | | +90 | $^{\circ}$ C |

Phase Noise (1 Hz BW, Typical)

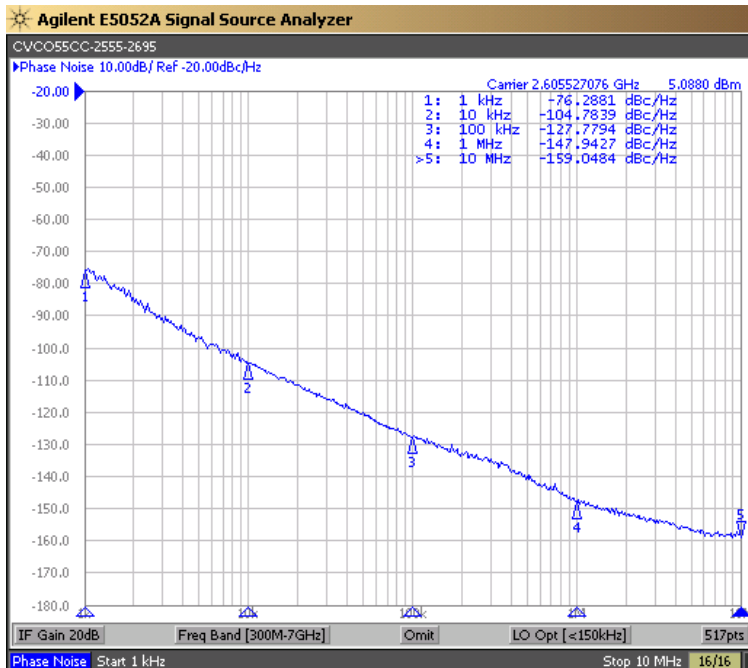

Tuning Curve (Typical)

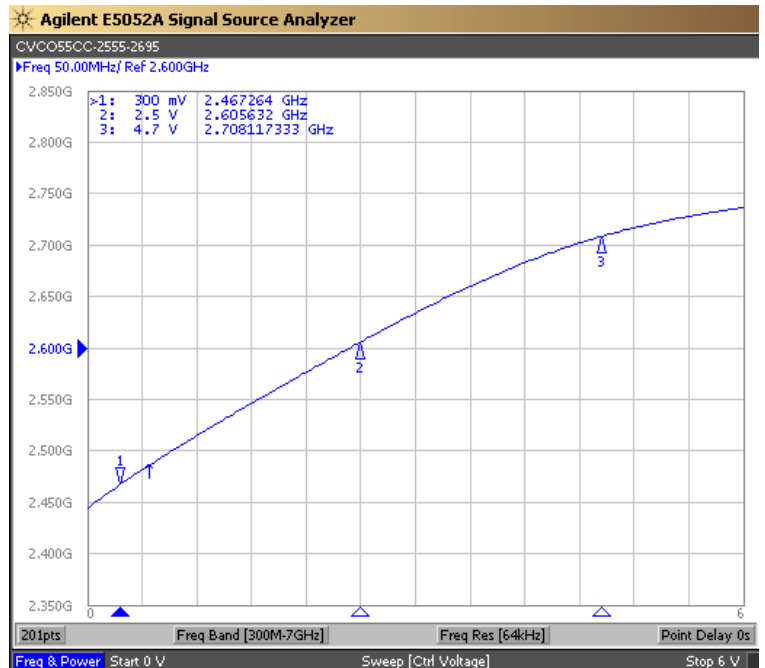

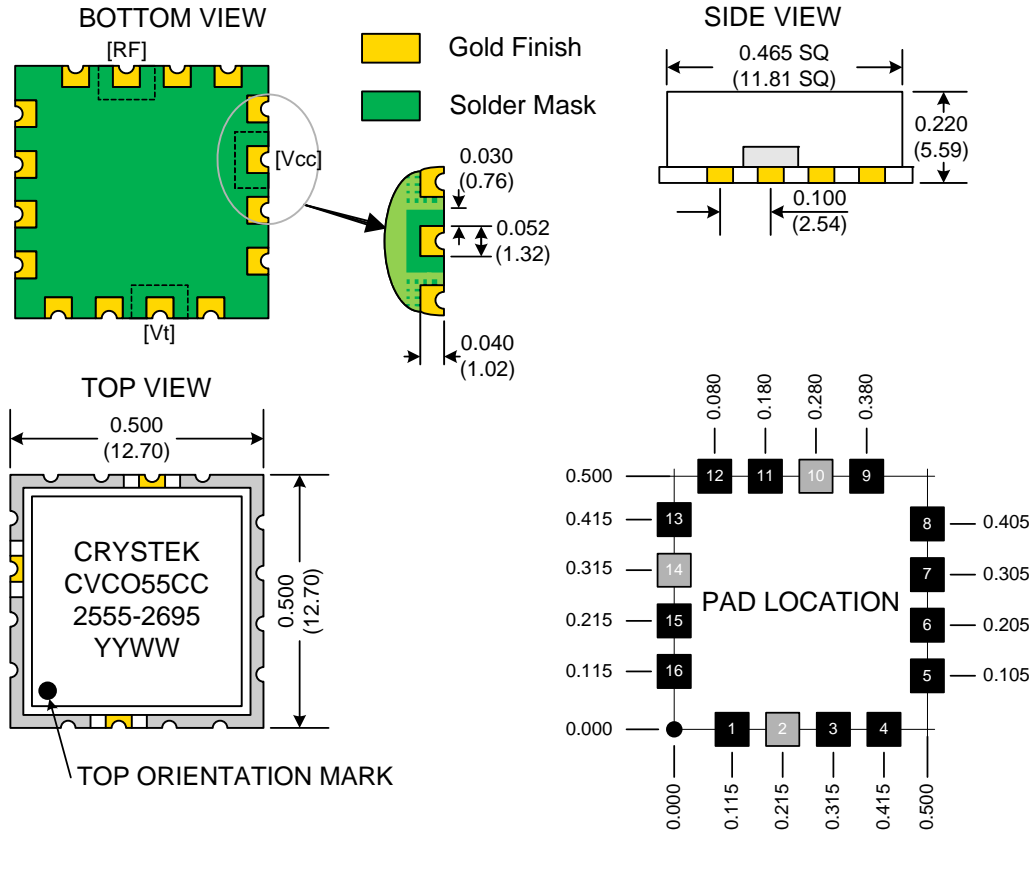

TAPE AND REEL



Drawing not to scale

Product Control:

| | | | |
|----------------------|--------------------|---------------|-----------|
| Crystek Part Number: | CVCO55CC-2555-2695 | Release Date: | 24-Mar-10 |
| Revision Level: | A | Responsible: | C. Vales |

Specification is subject to change without notice