



Innovative **Technology**  
for a **Connected** World

# Multiport POE Injector

## POE-4x48i-AF, POE-4x48, POE-4x24i, POE-4x18i



### 4-PORT POWER-OVER-ETHERNET INJECTOR/POWER SUPPLY

The active POE injector is an advanced, non-proprietary power injector/power supply. The POE-4x48i-AFI will function with any equipment compliant with IEEE 802.3af POE standards.

Using POE to power remote devices has several advantages including:

- The power supply can be centrally located where it can be attached to an uninterruptible power supply.
- The user has the ability to easily power on reset the attached equipment from a remote location.
- There is no need to run additional power cabling to the device as power can be supplied over the CAT5 Ethernet cable.

### FEATURES

- POE 4 port injector is available for 48 V, 24 V, and 18 V
- Compact and cost effective solution for remote Ethernet terminal
- Plug-and-play
- Auto disconnection for over-voltage and under-voltage
- Independent over-current and short-circuit protection on each port
- Individual port status indicators

### MARKETS

- Remote routers, access points, and bridges
- Remote networking equipment
- SOHO equipment
- IP camera systems
- VOIP systems
- IP phone systems
- WiMAX

**global solutions: local support™**

Americas: +1.847.839.6907  
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12  
IAS-EUSales@lairdtech.com


Asia: +1.65.6.243.8022  
IAS-AsiaSales@lairdtech.com

[www.lairdtech.com](http://www.lairdtech.com)

# Multiport POE Injector

## POE-4x48i-AF, POE-4x48, POE-4x24i, POE-4x18i

SPECIFICATIONS	POE-4x48i-AF	POE-4x48	POE-4x24i	POE-4x18i
No. of Ports	4 X legacy Ethernet ports input; 4 X PoE ports output			
802.3af compliant	Yes	No	No	No
Data Rates	10/100 Mbps	10/100 Mbps	10/100 Mbps	10/100 Mbps
PoE Output	Pin Assignment and Polarity: 4/5 (+), 7/8 (-);			
Output Power Voltage:	-48 V	-48 V	-24 V	-18 V
Maximum per POE port (watts)	Up to 16.8 W	Up to 24 W	Up to 24 W	Up to 18 W
Maximum for all POE ports (watts)	67.2 W	96 W	96 W	72 W
AC Input Voltage	90 to 264 Vac	90 to 264 Vac	90 to 264 Vac	90 to 264 Vac
AC Input Current	1.6 A @ 110 Vac /0.8A @ 220 Vac	1.6 A @ 110 Vac /0.8 A @ 220 Vac	1.6 A @ 110 Vac /0.8 A @ 220 Vac	1.2 A @ 110 Vac /0.6 A @ 220 Vac
AC Frequency	47 to 63 Hz	47 to 63 Hz	47 to 63 Hz	47 to 63 Hz
Dimensions	116 mm (W) x 150 mm (D) x 41 mm (H)			
Weight	420 g	420 g	420 g	420 g
AC Powered Indicators	Red	Green	Green	Green
Channel Powered Indicators	Green	Green	Green	Green
Channel Alarm Indicators	Red	LED off	LED off	LED off
Environmental Conditions	Operating Ambient Temperature: 0 to 60° C; Operating Humidity: Maximum 90%; Non-condensing Storage Temperature: -20 to 80° C; Storage Humidity: Maximum 93%, Non-condensing			
Certificate	CE, FCC, CB applying			
Plastic Case Material	PC			

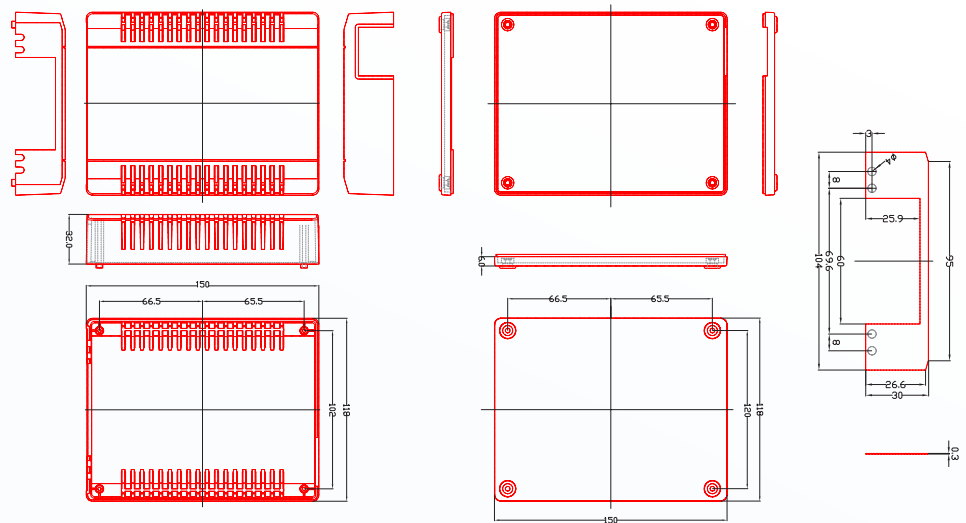

### PART NUMBERS

POE-4x48i-AF	4 X 48 V/0.35 A 802.3af compliant injector/Power supply
POE-4x48i	4 X 48 V/0.5 A non-802.3af compliant injector/Power supply
POE-4x24i	4 X 24 V/0.8 A non-802.3af compliant injector/Power supply
POE-4x18i	4 X 18 V/1 A non-802.3af compliant injector/Power supply

ANT-DS-POE-Multiport 0611

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2011 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.